


HUAWEI LTE CPE B593

1. Open the Run Program and type <http://192.168.1.1>

U can open the Run Program like this way



Click this button on the keyboard

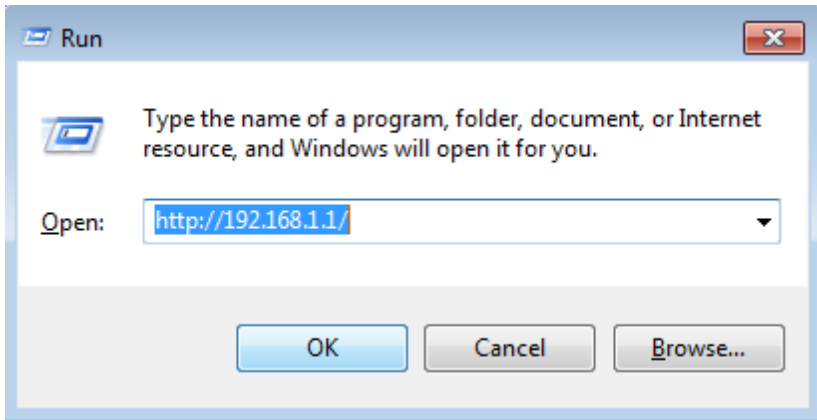

2. Login to the LTE



3. Select **Home** and go to **Quick Setup** & select **Wi-Fi Security**.

The screenshot shows the 'Quick Setup' page for SLT 4G LTE. The navigation bar at the top includes 'Home', 'Internet', 'LAN', 'Wi-Fi', 'Security', 'Services', 'VoIP', and 'System'. The left sidebar has 'Overview', 'Product Information', 'Quick Setup' (highlighted), and 'Update'. The main content area is titled 'Quick Setup' and shows a progress bar with steps: PIN, Internet, Wi-Fi, Wi-Fi Security (current), and OK. Below the progress bar, there is a section for setting wireless network parameters. The 'Security' dropdown is set to 'WPA-PSK & WPA2-PSK'. The 'Show password' checkbox is unchecked. The 'WPA-PSK' field contains a masked password (8 dots). The 'WPA encryption' dropdown is set to 'TKIP+AES'. At the bottom right, there are '< Back' and 'Next >' buttons.

Select **Security** as **WPA-PSK & WPA2-PSK**

On **WPA-PSK** should enter a password for **Wi-Fi**. Should be more than 8 characters.

WPA encryption should select to **TKIP-AES**

CLICK **Next** to continue.

This screenshot is identical to the previous one, but the 'Show password' checkbox is now checked. The 'WPA-PSK' field now displays the password 'abcd1234'. The 'WPA encryption' dropdown remains set to 'TKIP+AES'. The '< Back' and 'Next >' buttons are still present at the bottom right.

Click **Show password** to know the **Wi-Fi password**.

Then click **Next** to continue.

4. Click **OK** to go further.

Welcome To SLT 

Overview
Product Information
Quick Setup
Update

Quick Setup


PIN >> Internet >> Wi-Fi >> Wi-Fi Security >> **OK**

Make sure that the following settings are correct. Click **Submit** for the settings to take effect.


Network mode:	4G
Connection mode:	Always on
Wi-Fi:	Enabled
Mode:	802.11b/g/n
Country/Region:	UNITED STATES
Channel:	Auto
SSID:	madushan
Hide SSID broadcast:	Disable
Security:	WPA-PSK & WPA2-PSK
WPA-PSK:	abcd1234
WPA encryption:	TKIP+AES

[< Back](#) [Submit](#)

5. Click **Submit** to finish the settings.

 English [Help](#) [Logout](#)

[Home](#) | [Internet](#) | [LAN](#) | [Wi-Fi](#) | [Security](#) | [Services](#) | [VoIP](#) | [System](#)

Welcome To SLT 

The Wi-Fi module is restarting... Please wait.

6. After submission the message comes as **“The Wi-Fi module is restarting...Please wait”**
Then customer can login to Wi-Fi.